

TYTAN LED ENDURA MINUS 1150mm 9000lm IP66 840



INDUSTRIAL LIGHTING



CHARACTERISTIC

Index :	358043
Supply voltage :	220-240V
Frequency :	50 - 60Hz
Ingress protection IP :	IP66
Impact resistance IK :	IK09
Rated power :	56W
Energy efficiency class :	A++
Dimensions :	1152/85/80mm
Working temperature :	from -35°C to +35°C
Luminous flux * :	9000lm


* Initial, tolerance +/- 10%

SPECIFICATION

TYTAN LED is a fitting from NEXT GEN line, which is a new generation of fittings in LED technology. The fitting, designed from scratch, allows new solutions improving the light distribution and temperature balance. Branded led diodes and new LED GO! panels have influence on a very high luminous flux: 150 lm/W. It guarantees the best required lighting level and energy saving up to 68%. The solution based on integration of the diffuser and LED panel is applied in the fitting. The fitting has a lot of facilities making the mounting easier and faster: the system of diffuser suspension, adjustable mounting brackets ensuring the mounting tolerance +/-40mm. Standard equipment of the fitting: clips made of stainless steel (INOX). Specification: color temperature 4000K; CRI>80; LED panels lifespan 100000 hours.

LUMINOUS INTENSITY DISTRIB. CURVE

TYTAN LED ENDURA MINUS 1150mm
9000lm IP66 840 (56W)

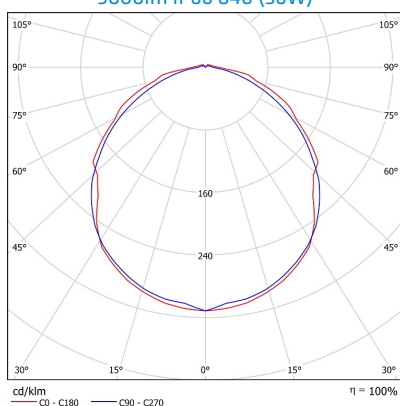

APPLICATION

TYTAN LED ENDURA PLUS is a fitting designed for lighting surfaces with the ambient temperature up to +55°C. The unfavourable conditions of the environment do not have influence on the fitting's reliability and efficacy. In rooms such as cold stores, the requirements for lighting are far from standard. Only the fittings especially suited for working in such conditions can be used in rooms with cold temperatures. TYTAN LED ENDURA MINUS is a fitting designed for lighting surfaces with the temperature down to -35°C.

FEATURES

Standard Deviation Colour Matching (SDCM): ≤3

TYTAN LED ENDURA MINUS 1150mm 9000lm IP66 840



INDUSTRIAL LIGHTING

TECHNICAL DATA

Index:	358043	Luminous efficacy:	145lm/W
Supply voltage:	220-240V	Luminous flux* :	9000lm
Frequency:	50 - 60Hz		
Ingress protection IP:	IP66		
Impact resistance IK:	IK09		
Rated power:	56W		
Energy efficiency class:	A++		
Electrical protection class:	I		
Dimensions:	1152/85/80mm		
Net weight of 1 unit:	1,52kg		
Material of the body:	PC		
Colour temperature:	4000K		
Mounting version:	Surface / suspended		
Colour of the body:	Grey		
Clips:	Inox		
Working temperature:	from -35°C to +35°C		
Lamp power factor:	0,9		
(EAN) European Article Number:	5905963358043		
CE mark:	PC		
Material of the diffuser:	PC		
Type of the diffuser:	MAT		
Replaceable light source:	No		
Nominal lamp lifespan:	74000h L70B50		
Failure 5000h:	≤1%		
Number of on/off switching cycles before premature lamp failure:	25000		
Warm-up time to 60% of total luminous flux:	Negligible		
Compatibility with dimmers:	No		
For outdoor use:	Yes		
Colour rendering:	Ra>80		
Nominal radiation angle:	120°		
Light source:	LED GO!		
Units per package:	1pc.		

* Initial, tolerance +/- 10%

The company reserves the right to make design changes or upgrades in the presented product.
Product data sheet does not constitute an offer.

Revision date: 2017-09-01



Lena Lighting S.A.
ul. Kornicka 52
63-000 Sroda Wielkopolska

tel. +48 (61) 28 60 300
fax.+48 (61) 28 54 059
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE.



This product is a subject to electric and electronic waste equipment regulations (WEEE).



6/2017