


COMPACT LED EVO N 52W 840 OPAL II CLASS



OFFICE LIGHTING

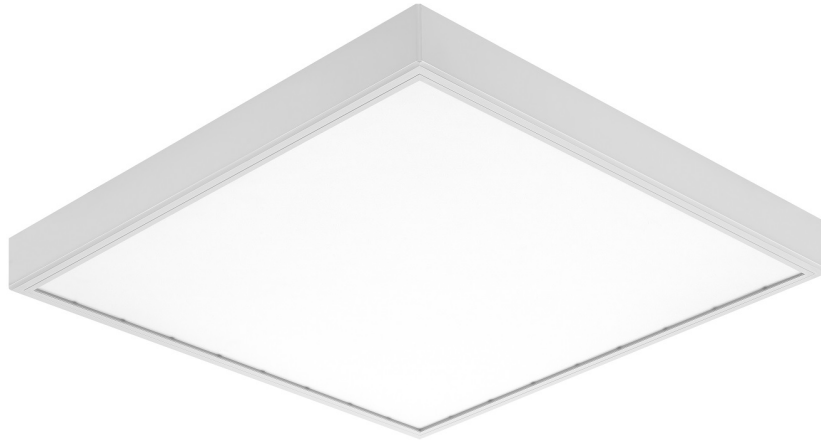

CHARACTERISTIC

| | |
|-------------------------------|-----------|
| Index : | 628122 |
| Supply voltage : | 220-240V |
| Frequency : | 50 - 60Hz |
| Ingress protection IP : | IP20 |
| Impact resistance IK : | IK07 |
| Rated power : | 52W |
| Energy efficiency class : | A+ |
| Electrical protection class : | II |
| Colour temperature : | 4000K |
| Luminous flux * : | 5450lm |

* Initial, tolerance +/- 10%

SPECIFICATION


Compact LED luminaire designed for surface installation. Equipped with energy-saving LED GO! panels and an evenly highlighted opal or prismatic diffuser, providing low glare. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions.

LUMINOUS INTENSITY DISTRIB. CURVE

COMPACT LED EVO N 52W 840 OPAL II CLASS

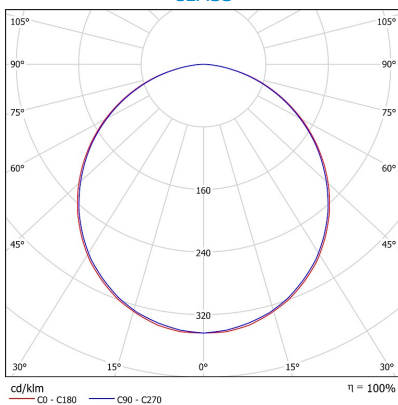

COMPACT LED EVO N 52W 840 OPAL II CLASS



OFFICE LIGHTING

TECHNICAL DATA

| | |
|------------------------------|---------------------|
| Index: | 628122 |
| Supply voltage: | 220-240V |
| Frequency: | 50 - 60Hz |
| Ingress protection IP: | IP20 |
| Impact resistance IK: | IK07 |
| Rated power: | 52W |
| Luminous efficacy: | 115lm/W |
| Energy efficiency class: | A+ |
| Electrical protection class: | II |
| Dimensions: | 620/620/66mm |
| Net weight of 1 unit: | 2,8kg |
| Material of the body: | ABS |
| Colour temperature: | 4000K |
| Mounting version: | Surface |
| Colour of the body: | White |
| Working temperature: | from -20°C to +35°C |
| Luminous flux* : | 5450lm |
| Material of the diffuser: | PC |
| Type of the diffuser: | Opal |
| Replaceable light source: | No |
| Power supply included: | Yes |
| Compatibility with dimmers: | Without dimming |
| For outdoor use: | No |
| Colour rendering: | Ra>80 |
| Light source: | LED GO! |
| Disconnectable wire: | Yes |
| Nominal lamp lifespan: | 50000h L70B50 |

* Initial, tolerance +/- 10%

The company reserves the right to make design changes or upgrades in the presented product.
Product data sheet does not constitute an offer.

Revision date: 2017-10-30



Lena Lighting S.A.
ul. Kornicka 52
63-000 Sroda Wielkopolska

tel. +48 (61) 28 60 300
fax.+48 (61) 28 54 059
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU ROHS Directive 2011/65/UE.



This product is a subject to electric and electronic waste equipment regulations (WEEE).



18/2017