

COMPACT LED EVO P 32W 840 OPAL II KL

LOUVRES



220-240 V | LED | | | IP20 | IP44 | IK07 |

TECHNICAL PARAMETERS

Index:	628405
Ingress protection:	IP44/IP20
Impact resistance:	IK07
Rated power [W]:	32
Luminous flux [lm]*:	3800
Colour temperature [K]:	4000
Colour rendering index:	>80
Energy efficiency class:	A+
Electrical protection class:	II
Material of the body:	ABS

*Tolerance +/- 10%

CHARACTERISTICS


Compact LED luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED GO! panels and an evenly highlighted. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.

[COMPACT LED product site](#)

LIGHT CURVES

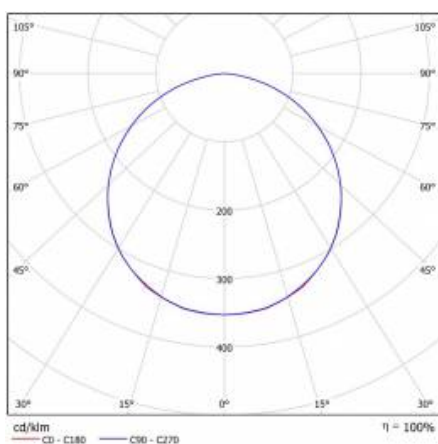

COMPACT LED EVO P 32W 840 OPAL II KL

LOUVRES

TECHNICAL PARAMETERS TABLE

Index:	628405	Material of the body:	ABS
Light source:	LED GO!	Colour of the body:	white
Rated power [W]:	32	Dimensions [mm]:	595/595/66
Rated power of the luminaire [W]:	33	Impact resistance:	IK07
Supply voltage [V]:	220 - 240	Ingress protection:	IP44/IP20
Frequency [Hz]:	50 - 60	Mounting version:	recessed
Luminous flux [lm]:	3800	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm per W]:	113	Net weight of the luminaire [kg]:	2
Energy efficiency class:	A+	CE certificate:	01/2018
Electrical protection class:	II	PZH certificate:	HK/K/0904/01/2017
Colour temperature [K]:	4000	EAN:	5905963628405
Colour rendering index:	>80	Category type:	louvres
SDCM:	≤ 3	Category of application:	educational, commercial, HORECA
LED lifespan [h]:	50000		
Radiation angle [°]:	120		
Diffuser material:	PC		
Diffuser type:	OPAL		

*Tolerance +/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2018-03-15



Lena Lighting S.A.
ul. Kórnicka 52
63-000 Środa Wielkopolska

tel. +48 61 28 60 300
e-mail: office@lenalighting.pl
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



01/2018