

# COMPACT LED EVO P 32W 840 PRM II KL

## LOUVRES



220-240 V | LED |  |  | IP20 | IP44 | IK07 | 

### TECHNICAL PARAMETERS

Index:	628429
Ingress protection:	IP44/IP20
Impact resistance:	IK07
Rated power [W]:	32
Luminous flux [lm]*:	4550
Colour temperature [K]:	4000
Colour rendering index:	>80
Energy efficiency class:	A++
Electrical protection class:	II
Material of the body:	ABS

\*Tolerance +/- 10%

### CHARACTERISTICS


Compact LED luminaire designed for installation in modular ceilings or surface mounting. Equipped with energy-saving LED GO! panels and an evenly highlighted. Made of plastic. Assembly or electrical connection does not require removing the diffuser.

### APPLICATION

This luminaire is designed for indoor use in offices or general utility rooms. It can be used as the main light source and it is particularly well-suited to be used as a light source for workplaces that require eyesight focus. The luminaire is used both in new applications, as well as it can replace traditional fluorescent luminaires with energy-saving LED solutions. The fitting's design is suitable for mounting in 600x600 modular ceilings.

[COMPACT LED product site](#)

### LIGHT CURVES

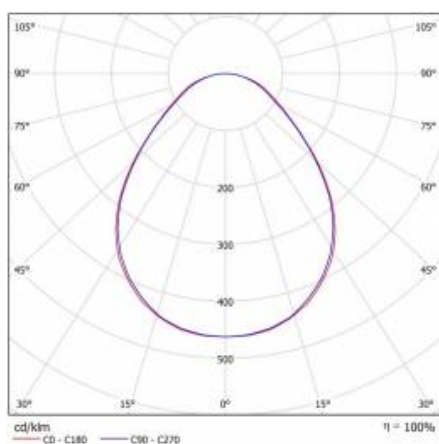


# COMPACT LED EVO P 32W 840 PRM II KL

## LOUVRES

### TECHNICAL PARAMETERS TABLE

Index:	628429	Material of the body:	ABS
Light source:	LED GO!	Colour of the body:	white
Rated power [W]:	32	Dimensions [mm]:	595/595/66
Rated power of the luminaire [W]:	33	Impact resistance:	IK07
Supply voltage [V]:	220 - 240	Ingress protection:	IP44/IP20
Frequency [Hz]:	50 - 60	Mounting version:	recessed
Luminous flux [lm]:	4550	Working temperature [°C]:	from -20 to +35
Luminous efficacy [lm per W]:	136	Net weight of the luminaire [kg]:	2
Energy efficiency class:	A++	CE certificate:	01/2018
Electrical protection class:	II	PZH certificate:	HK/K/0904/01/2017
Colour temperature [K]:	4000	EAN:	5905963628429
Colour rendering index:	>80	Category type:	louvres
SDCM:	≤ 3	Category of application:	educational, commercial, HORECA
LED lifespan [h]:	50000		
Radiation angle [°]:	120		
Diffuser material:	PC		
Diffuser type:	PRM		

### TECHNICAL DETAILS



COMPACT LED EVO PRM

\*Tolerance+/- 10%

The company reserves the right to make design changes or upgrades in the presented product. Product data sheet does not constitute an offer.

Revision date: 2018-03-15



Lena Lighting S.A.  
ul. Kórnicka 52  
63-000 Środa Wielkopolska

tel. +48 61 28 60 300  
e-mail: office@lenalighting.pl  
www.lenalighting.pl



The luminaire complies with the EU RoHS Directive 2011/65/UE



This product is a subject to electric and electronic waste equipment regulations (WEEE).



01/2018