


Midi Horns and Sirens / EvoSIGNAL

## Midi Sounder 12/24VAC/DC GY



<b>Part No.:</b>	<b>161.700.70</b>
<b>Series:</b>	<b>EvoSIGNAL Midi</b>



MECHANICAL DATA	
Height	78 mm
Diameter	85 mm
Materials	PC PC/ABS
Housing colour	Gray
Protection category	IP66
Connection	Push-in terminal
cross-sectional area minimum	0,25mm <sup>2</sup> / 24AWG
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG
Acoustic service life	5,000 h minimum
Working temperature minimum	-30°C
Working temperature maximum	+60°C
Weight with packaging	236 g
Product weight	136 g

ELECTRICAL DATA	
Operating voltage	12V 24V
Operating voltage type	AC/DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	12 VDC
Rated operational current	175 mA
Protection class	Protection class 2
Pollution degree	3
Overvoltage category	III

ACUSTICAL DATA	
Volume/dB(max) at 1m distance	110 dB(A)
Acoustic signal image	Multi-tone
Number of tones	10 tone
Audio frequency	3300 Hz





For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Midi Horns and Sirens / EvoSIGNAL

**Midi Sounder 12/24VAC/DC GY**

DRAWING

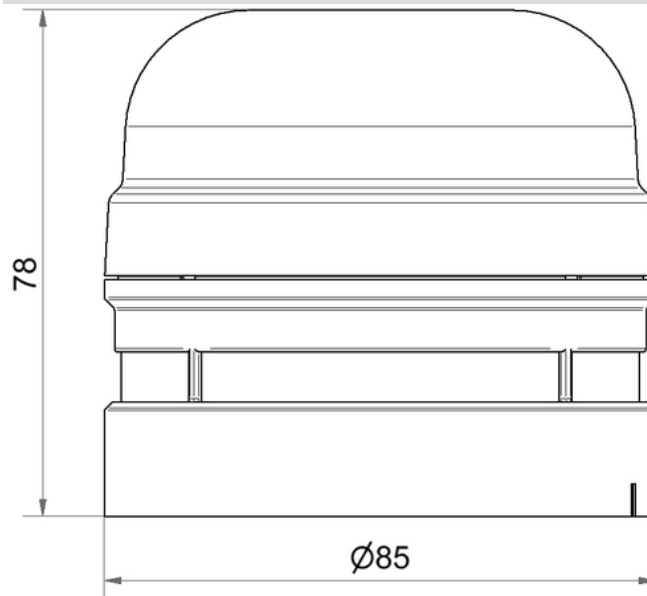

 For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.